




FLEXADUX® Hyp CL

**Light weight and very flexible
Hypalon® ducting**

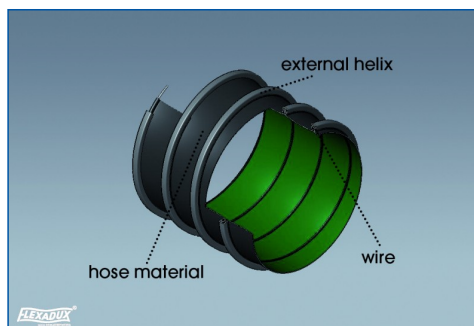

Material:

Hypalon® coated polyester fabric / external:
black, internal: green

Single Length:

3 to 10 meters

Temperature Resistance:

- 40° C to + 175° C

Applications:

Suction of hot or cold fumes, gases or dust in all
fields of industry

Properties:

Good temperature, UV and ozone resistance,
excellent chemical resistance, outer wear strip,
flame retardant and excellent axial
compressibility, good mechanical strength.

Special version:

Hypalon® T CL - 2-ply, internal: Teflon®-foil,
external: Hypalon®-coated polyester tissue

TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Work. Press. (bar)	Max. Vacuum (bar)
50	0,40	0,40	30	0,85	0,40
60	0,48	0,40	36	0,78	0,28
76	0,60	0,40	45	0,60	0,17
80	0,62	0,40	48	0,58	0,16
102	0,65	0,40	60	0,50	0,10
110	0,70	0,40	66	0,48	0,08
120	0,72	0,40	72	0,35	0,06
127	0,80	0,40	75	0,32	0,06
152	0,90	0,40	90	0,22	0,04
160	0,94	0,40	96	0,21	0,04
180	1,05	0,40	108	0,17	0,03
203	1,21	0,40	120	0,15	0,02
254	1,70	0,40	175	0,10	0,01
305	2,13	0,40	210	0,07	0,01
350	2,50	0,40	245	0,06	0,01
407	3,15	0,40	280	0,05	0,01
508	4,15	0,40	400	0,04	0,01

Further diameters available upon request!

Technical data are based on + 25° C.



SCHAUENBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91- 0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com